

# SPECIFICATIONS

Engine		RZ4E-TC	4JJ3-TC		
Displacement [cm <sup>3</sup> ]		1,898	2,999		
Bore x Stroke [mm]		80 x 94.4	95.4 x 104.9		
Max Power kW[ps]/rpm*		110kW (150ps) / 3,600	140kW (190ps) / 3,600		
Max Torque Nm(kgm)/rpm*		350Nm (35.7 kgm) / 1,800-2,600	450Nm (45.9 kgm) / 1,600-2,600		
Fuel system		In-line, 4 cylinder, Common-rail engine, Electronic controlled fuel injection pump with intercooler and turbo charger			
Fuel Tank capacity [litre]		76 litre			
Transmission		MVL-6Y	AWR6B45-II	MVL-6S	AWR6B45-II
Gear Ratio	1st	4.942	3.600	4.942	3.600
	2nd	2.686	2.090	2.452	2.090
	3rd	1.527	1.488	1.428	1.488
	4th	1.000	1.000	1.000	1.000
	5th	0.749	0.687	0.749	0.687
	6th	0.634	0.580	0.634	0.580
	Reverse	4.597	3.732	4.597	3.732
	Final Gear	2WD & 4WD	3.727	-	3.727
	2WD High-ride & 4WD	4.1	4.1	-	-
	4WD Regular cab	3.909	-	3.583	-
Suspension					
Suspension	Front	Independent, double wishbone, coil springs with stabiliser bar and gas shock absorber			
	Rear	Leaf spring with gas shock absorber			
Brake					
Brake	Front	Ventilated disc with 2-pot calipers			
	Rear	Leading and trailing drums			
Weight					
Gross vehicle weight (kg)	2WD & 2WD High-ride	2,700			
	4WD	2,800			
Gross axle weight (kg)	Front	2WD	1,250		
		2WD High-ride & 4WD	1,450		
	Rear	2WD	1,870		
		2WD High-ride & 4WD	1,910		

\* ISO NET

ISUZU MOTORS INTERNATIONAL OPERATIONS (THAILAND) CO., LTD. reserves the right to change specifications and equipment without notice. Details of specifications and equipment mentioned or shown in this specification sheet are also subject to change in order to meet local conditions and government requirements. Features and specifications may vary in appearance and/or availability according to region.

Please inquire at your local ISUZU distributor or dealer for more complete details on available models and their specifications.

## ISUZU

ISUZU MOTORS INTERNATIONAL OPERATIONS (THAILAND) CO., LTD.

1010 Shinawatra Tower III, 24th-25th Floor, Vibhavadi Rangsit Road, Chatuchak, Bangkok 10900, THAILAND

Exterior		RBA	RBB	RBC	RBD	RBE
Front bumper		Material Black	Material Black	Body colour	Body colour	Body colour with gun metallic
Rear bumper		Material Black	Material Black	Body colour	Body colour	Body colour
Side view mirror		Material Black	Material Black	Body colour	Chrome	Gun metallic
Door handle		Material Black	Material Black	Titanium silver colour	Chrome plating	Dark gray metallic
Tail gate handle		Material Black	Material Black	Titanium silver colour	Chrome plating	Dark gray metallic
Tires & Wheels		Tires		Wheels		
2WD	Reg	RBA	195R15C	15"X6.0J-Steel		
		RBB	195R15C	15"X6.0J-Steel		
	Crew	RBA	195R15C	15"X6.0J-Steel		
		RBB	195R15C	15"X6.0J-Steel		
	RBC	215/70R15	15"X6.5J-Steel			
2WD High-ride	Crew	RBC	255/65R17	17"X7.0J-Aluminum in silver		
4WD	Reg	RBA	205R16C	16"X6.5J-Steel		
		RBB	205R16C	16"X6.5J-Steel		
	Ext	RBC	255/65R17	17"X7.0J-Aluminum in silver		
		RBD	265/60R18	18"X7.5J-Aluminum in silver		
	Crew	RBA	255/65R17	17"X7.0J-Steel		
		RBB	255/65R17	17"X7.0J-Steel		
		RBC	255/65R17	17"X7.0J-Aluminum in silver		
		RBD	265/60R18	18"X7.5J-Aluminum in silver		
	RBE	265/60R18	18"X7.5J-Aluminum in dark gray			
Minimum turning circle (m)	2WD					12.2
*Curb to curb	2WD High-ride & 4WD					12.5



Galena Gray Metallic



Mercury Silver Metallic



Obsidian Gray



Onyx Black Mica



Red Spinel Mica



Sapphire Blue Mica



Silky White Pearl




Splash White




Valencia Orange Metallic

# MODEL LINE UP AND DIMENSIONS


## Crew Cab 4WD - RBE

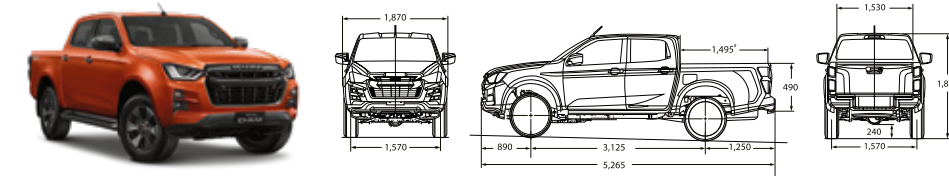


## Extended Cab 4WD - RBD

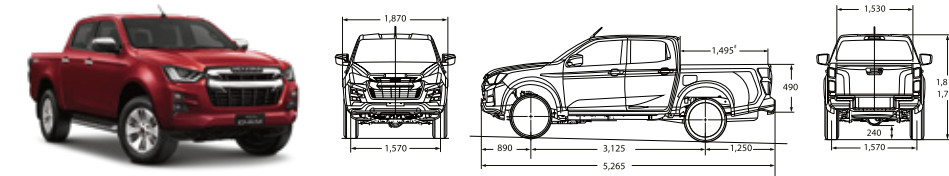


## Crew Cab 2WD High-ride & 4WD - RBC

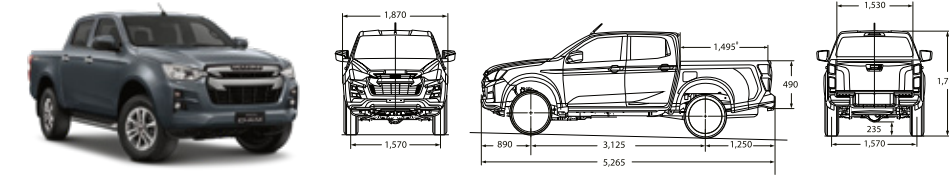


## Crew Cab 4WD - RBB

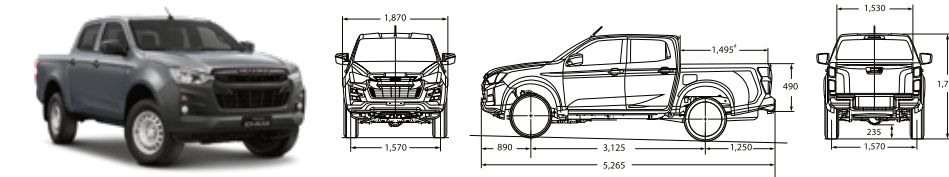


## Crew Cab 4WD - RBA

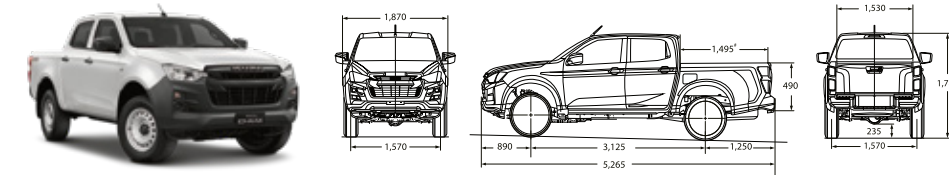


## Extended Cab 4WD - RBD

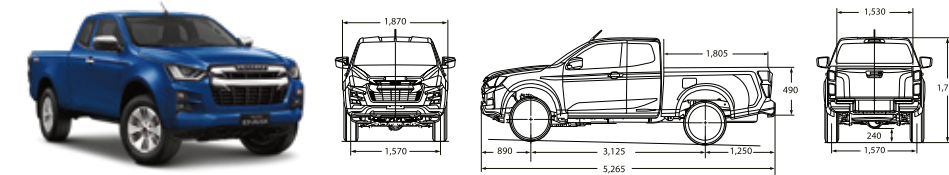


## Extended Cab 4WD - RBC

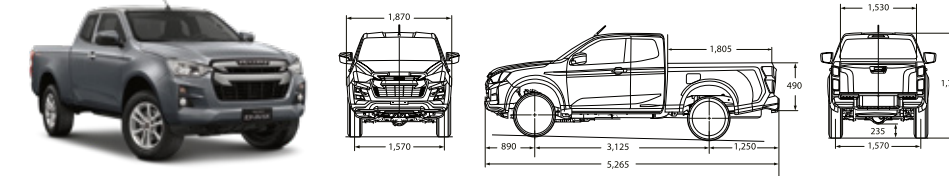


## Crew Cab 2WD - RBC

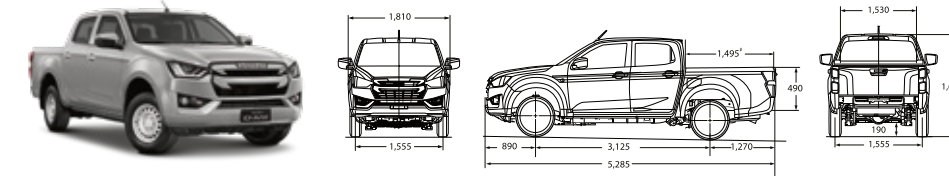


## Crew Cab 2WD - RBB

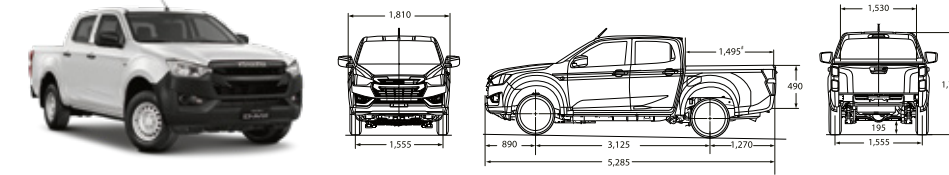


## Crew Cab 2WD - RBA

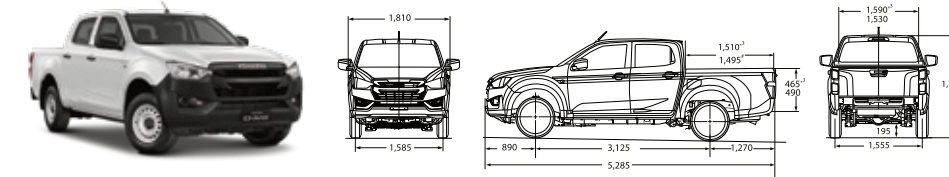

## Regular Cab 2WD & 4WD - RBB

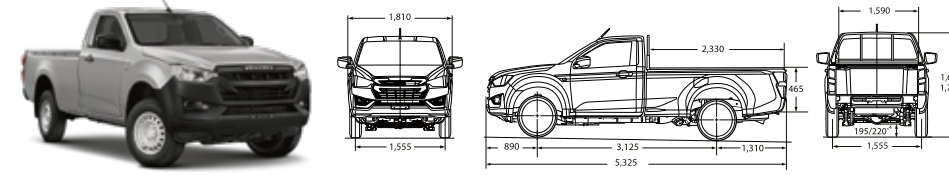

## Regular Cab 2WD & 4WD - RBA

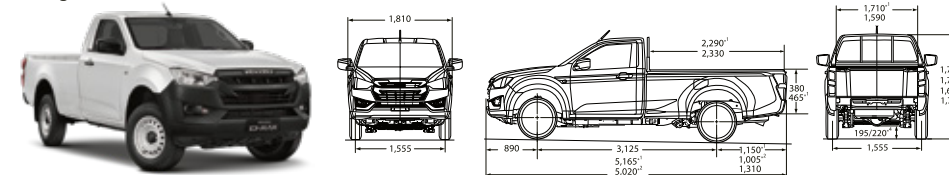

# : At Floor = 1,571 mm.

\*1 : Flatdeck

\*2 : Cab Chassis

\*3 : Rear cargo with outer hook

\*4 : 4WD with 205R16C

\*5 : with Roof Rail

